



SANREMO
COFFEE MACHINES

THE BRAVE INSPIRE

General Catalogue
2020

_ Index

Sanremo	_02
—	
Coffee Machines	_04
Opera 2.0	_06
Café Racer	_18
F18	_28
Verona RS	_32
Verona	_36
Zoe Competition	_38
Zoe	_40
Napoli	_42
Torino	_44
Treviso	—
—	
Grinders	_47
On demand	_48
Manual	_50
Automatic	_51
Accessories	_51
—	
Merchandise	_52
Wear	_54

THE BRAVE INSPIRE

A broad vision. A horizon defined by a high and ambitious goal, to be contemplated and then achieved, to be admired and eventually conquered.

Be inspired, take a deep breath. And then go: start your adventure.

Because courage is not the absence of fear, but the ability to dominate it.



SANREMO
COFFEEMACHINES

made in italy

SANREMO, MORE THAN A COMPANY

**A benchmark for innovation
and excellent espresso coffee
machines production Made in Italy;
an inspirational brand for coffee
lovers who celebrate the art
of coffee extraction.**

This is Sanremo: a fusion between a strong productive tradition and sparkling dreams. A winning bond which

leads the company year by year to be recognized at worldwide level as point of reference for the production of one of the best coffee machines. A unique production dpt., where manufacturing is made of the best technologies, materials, workmanship and best inspirations. An international research & development team, trained by professionals in the coffee industry united by the same fighting spirit which Sanremo machines express.

Coffee Machines




Opera 2.0



Opera. The full story
Watch the video




Versions



29.3 inches / 745 mm

2 group OP


- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

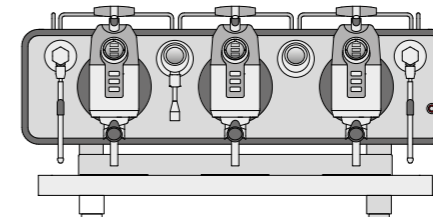

40.9 inches / 1040 mm

3 group OP


- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters

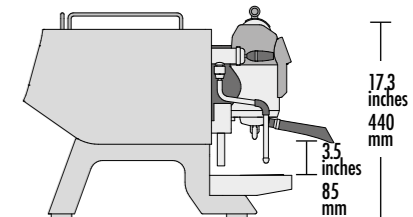

25.2 inches / 640 mm
20.1 inches / 510 mm

17.3 inches
440 mm
3.5 inches
85 mm

TALL VERSION

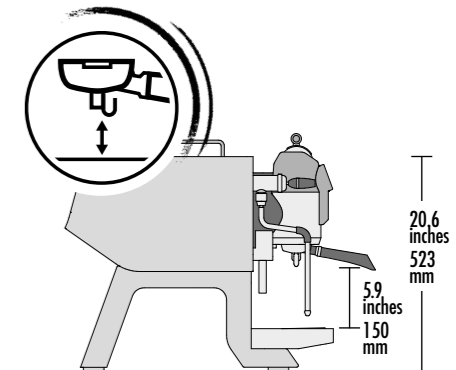


20.6 inches
523 mm
5.9 inches
150 mm



Technical data		2 group	3 group
voltage	V	220-240 1N / 380-415 3N	
power input	kW	7.7	8.3
steam boiler services	US gal / lt	2.11 / 8	2.64 / 10
services boiler resistance power	kW	3.5	3.5
external pump power	kW	0.15	0.15
preheating boiler capacity	US gal / lt	0.74 / 2.8	0.74 / 2.8
preheating boiler resistance power	kW	1.5	1.5
cup-heater power	kW	0.2	0.25
units boiler capacity	US gal / lt	0.264 / 1.0	0.396 / 1.5
units boiler resistance power	kW	1.6	2.4
net weight	lb / kg	200 / 91	249 / 113
gross weight (with shipping crate)	lb / kg	308 / 140	375 / 170.5

MULTI-BOILER SYSTEM

High accuracy thermal stability thanks to the Sanremo multiboiler system with sophisticated electronic boards that continuously control temperature throughout all phases of extraction. Steam and coffee circuits work totally independent to maximize performance in every working condition (also under high workload).

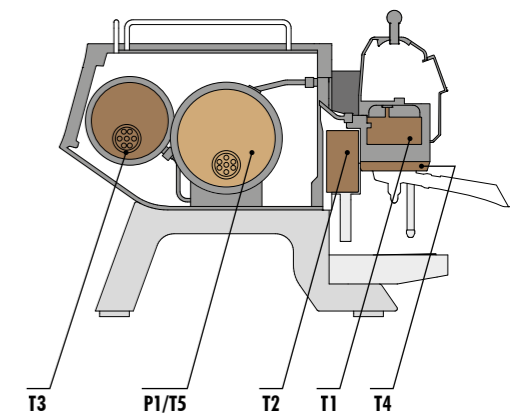


The Revolution

Be in control, express yourself

8

9



CDS SYSTEM

Maximum precision and full control on the three phases of coffee extraction

DOUBLE SELECTION BUTTONS

Easy-touch setting with 6 different profiles for individual groups




SMART LEVER

Coffee doses fast manual selection



POWER DRY STEAM

Low additional liquid during the milk steaming



GEAR PUMP PERFORMANCE

High and constant pressure in all conditions



EVERYTHING UNDER CONTROL

System digital display to provide visibility of all working parameters



HEART OF STEEL

For maximum thermal stability:

- Groups in AISI 316L weight 22 lb / 10 kg each
- Portafilters AISI 316
- Boilers AISI 316

WI-FI CONNECTION



EASY APP

Tablet or smartphone barista's Webapp for setting parameters



Opera. The Revolution
Link to the website

Characteristics



AISI 316L STEEL GROUPS WITH 22 lb / 10 kg PURE STEEL
Exclusive Sanremo design ensure exceptional thermal stability and maximum resistance to oxidation and lime scale.




AISI 316 STAINLESS STEEL PORTAFILTER WITH "COMPETITION FILTER"
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.



AISI 316L STAINLESS STEEL FREE MOTION STEAM TAPS
Flexible control system for producing and dispensing steam.



AISI 316L STAINLESS STEEL STEAM WAND "COOL TOUCH"
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.



CONTROL COFFEE DELIVERY SYSTEM (CDS)
Three phases extraction parameters full control (pre-infusion, infusion, post-infusion).



INDEPENDENT ADJUSTMENT OF THE PID INFUSION WATER TEMPERATURE
Precision setting (gradient $\pm 0.1^\circ\text{C}$ with measured constancy lower than 0.2°C).



INFUSION WATER DISPLAY
Indicates tea and herbal teas water brewing temperature. (In the two group it is shown with the steam boiler display)



STEAM BOILER DISPLAY
Indicates steam boiler temperature and pressure. (In the two group Opera it is shown with the infusion water display)



COFFEE UNIT SINGLE DISPLAY
Controls of all coffee extraction parameters.



MACHINE'S PROGRAMMING PARAMETERS DISPLAY
The internal display is a handy programming interface for the maintenance technician.



MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Instantaneous mixing of fresh water and steam for a better chemical and organoleptic quality.



GEAR PUMPS
Dedicated to each individual group, allow to change the pressure during infusion.



STEAM CONTROL ADJUSTABLE ELECTRONIC PRESSURE SWITCH
Sensor with 0.02 bar precision that allows the chosen pressure and steam in the boiler to be kept constant in all conditions of use.



PROGRAMMABLE CUP WARMER TEMPERATURE
Allows the cups to be kept at the optimum temperature in the most different climatic conditions.



EASY SERVICE
Fast access to the internal parts for quick and easy technical service.



AUTO-DIAGNOSIS, STATISTICAL DATA, SCHEDULED MAINTENANCE
Maintenance can be scheduled according to litres or number of coffees dispensed.



AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION
Programmable on-off timer for each day and/or daily timetables.



AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.



ENERGY SAVING SYSTEM
Insulation and energy saving system up until 40% compared to single boiler machines.



GROUP FLUSHING
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

Optional



TALL VERSION



* STAINLESS STEEL NAKED PORTAFILTERS



** HIGH POWER STEAMER TERMINAL (bigger holes diameter)



EXTERNAL VOLUMETRIC PUMP

Standard models

wide choice of version



✓ **Opera Steel**
Standard back panel: |BP1|



OPERA 2.0
THE REVOLUTION



✓ **Opera Black**
Standard back panel: |BP5|



Choose the panel

to suit your style



Back panel of each version can be customized, with finishes that meet all your needs and vision.

BP1 Etched crystal / backlight



BP2 Painted wood



BP3 Steel oxidized / backlight



BP4 Blackboard graphite rewritable



BP5 Black / backlight



BP6 Octane blue / backlight



✓ **Opera White**
Standard back panel: |BP2|



Tailor made finishes
collection 2020

12



✓ **Opera Octane**
Standard back
panel: |BP6|



✓ **Opera Oxid**
Standard back
panel: |BP3|



Everything in an App.

app dedicated to parameter settings for tablet.

(step A) GROUP SELECTION

(step B) PUSH / PULL LEVER SELECTIONS OF BUTTONS

**(step C) SELECTIONS OF PROFILE BUTTONS
PUSH / dose 1,2,3
PULL / dose 4,5,6**

(step D) TEMPERATURE REGULATION

(step E) DOSE REGULATION

(step F) INFUSION REGULATION

For each group it is possible to set:

Temperature

- water temperature T2
- group temperature T3
- steam temperature T5 (unique boiler for all groups)

Dose

- weight of ground coffee
- water dose
- pump pressure
- coffee weight

Infusion

- timing
- pump pressure
- amount of water

With the interface "Express yourself", the barista has total control of the extraction phase of his coffee and can manage each dispensing parameter according to his experience and professionalism.

To configure and set all the parameters of the machine, a specific App has been designed, which runs on tablet.

The application "Express yourself" utilizes a graphic interface, it is both user friendly and intuitive. This interface allows the user to set each groups relative parameters accurately for the perfect extraction.

Upon choosing the group (step A) and assigned a configured profile (step B,C) will define the general parameters of extraction: temperature and doses (step D,E). At the end it is possible to adjust the parameters relative of the 3 extraction's phases: pre-infusion, main infusion, post-infusion (step F).

Pre Infusion: 2.5 s

3.5 bar



Main Infusion: 71 ml

Pressure: 9.0 bar



Post Infusion: 2 ml

3.5 bar



(step F) Adjust the 3 extractions phases

This operation is simplified by the App. Everytime the user modify one of these parameter the software update automatically. What was set prior to the modification.



CONFIGURATIONS

- STANDARD
- STRONG
- BALANCED
- SWEET & LIGHT
- ... N (set by the user)
- ... N (set by the user)

It is possible to save and recall new configurations set by the user or the default ones, specifically designed to allow even the less experienced bartenders to obtain immediately excellent results in the cup.


Clicking in "save new configuration" you can save your perfect espresso dispensing menu and transfer it into another machine.

Opera wi-fi

the easiest way




Since today on the new Opera 2.0 is easier to handle, thanks to the **Sanremo Cloud** and **Webapp Expressyourself** interface, for an even easier and interactive using experience.

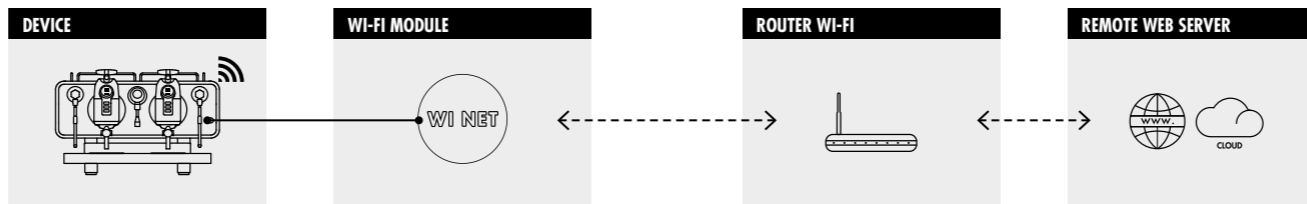

- Handling through Sanremo app, from smartphone, tablet, or pc, of all configuration parameters of the machine, without the need for physically being in front of it.
- Possibility of connecting multiple machines simultaneously for sharing, modifying, and setting of recipes and configurations.
- Simultaneous monitoring and handling of multiple machines by the same owner (e.g.: franchising in different locations).
- Statistical analysis of consumption, distribution, maintenance, configuration for all connected machines.
- Remote maintenance by the technician for updating, verification of the correct settings and parameters control.

INTRANET (RETE WI-FI LOCALE)

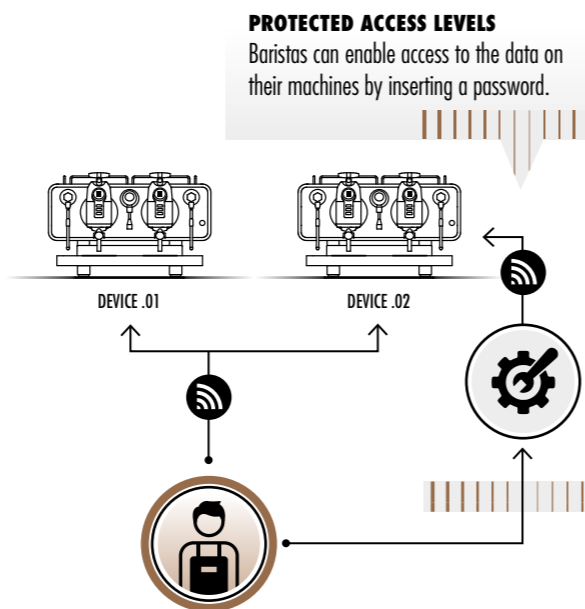


PROTECTED ACCESS LEVELS
Baristas can enable access to the data on their machines by inserting a password.

- PLUS + (USING THE LOCAL WI-FI NETWORK)**
- Reading and changing machine settings and parameters
 - Consumptions analysis for a better stock management
 - Meters reading of the coffee dispensed
 - Saving, restoring and sharing of settings (recipes) on your machines

Data exchange can only be effective in the wi-fi range.

INTERNET (RETE GLOBALE) / SANREMO CLOUD

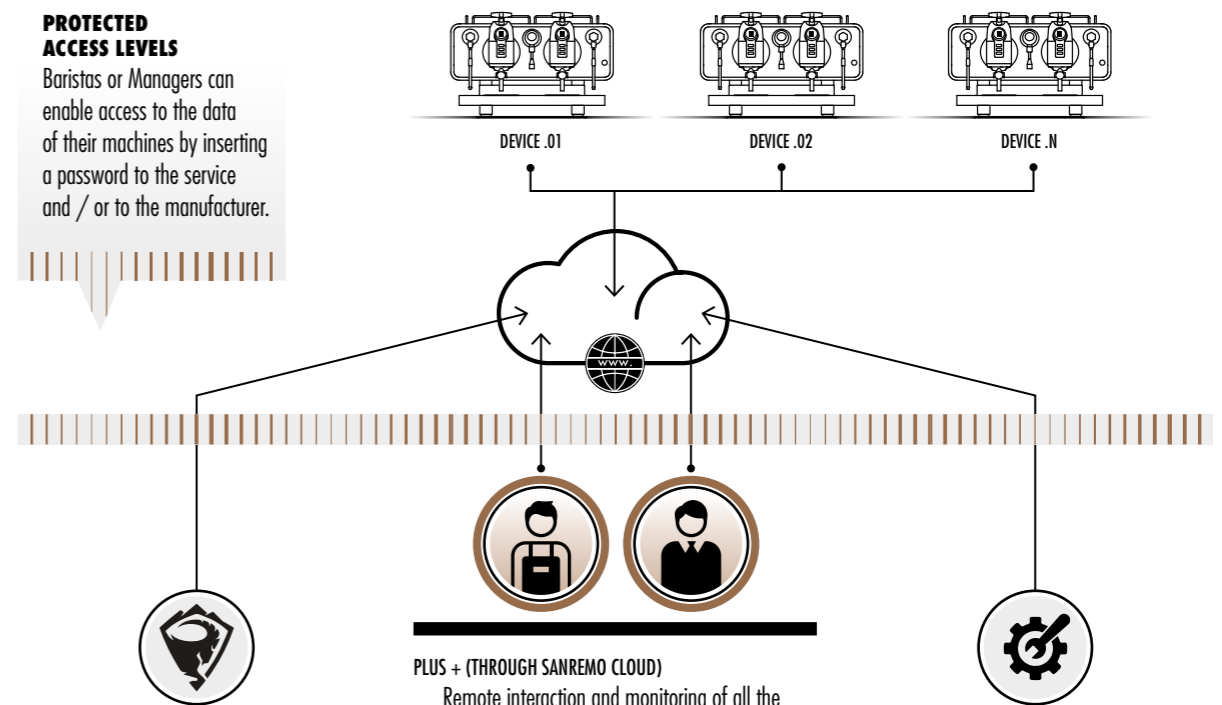

PROTECTED ACCESS LEVELS
Baristas or Managers can enable access to the data of their machines by inserting a password to the service and / or to the manufacturer.

- PLUS + (ENABLING THE MANUFACTURER)**
- Sending of App updates to the machines
 - Sending new settings (recipes)
 - Clearer and faster data collection aimed to resolve any technical/constructive problems
 - Useful information for the improvement and evolution of the product
 - Direct and continuous contact with the manufacturer

- PLUS + (THROUGH SANREMO CLOUD)**
- Remote interaction and monitoring of all the functions and performances of the machine
 - Reading and changing of the machine settings
 - Display of historical usage data
 - Consumptions analysis for a better stock management
 - Meters reading of the coffee dispensed
 - Saving, restoring and sharing of settings (recipes) on your machines


- PLUS + (ENABLING THE SERVICE)**
- Immediate report of anomalies
 - Diagnosis and possible remote troubleshooting
 - Reduction of machine downtime
 - Logistic planning and organization of maintenance interventions

- BARISTA**
- MANAGER**
- MAINTENANCE SERVICE**
- MANUFACTURER**
- SANREMO CLOUD**
- INTERNET GLOBAL NETWORK**
- LOCAL WI-FI NETWORK**

Café Racer



Versions

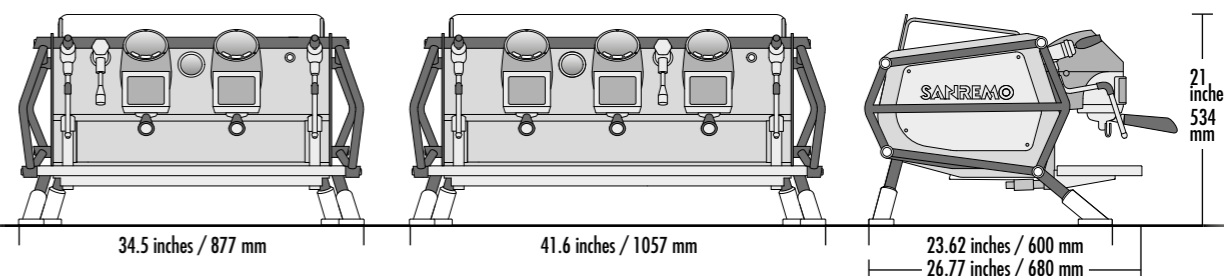


- 2 group CR**
- 2 steam taps
 - 1 water tap
 - 1 one-cup portafilters
 - 2 two-cup portafilters

- 3 group CR**
- 2 steam taps
 - 1 water tap
 - 1 one-cup portafilters
 - 3 two-cup portafilters



MULTIBOILER SYSTEM

Sanremo Café Racer multiboiler system ensures a new level of thermal precision thanks to the 4 points of temperature PID control.

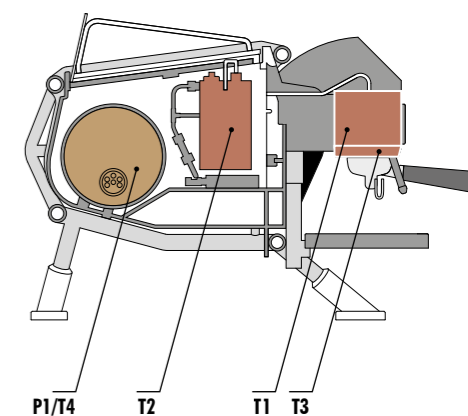

Technical data		2 group	3 group
voltage	V	220-240 1N / 380-415 3N	
power input	kW	7.03	8.35
steam boiler capacity	US gal / lt	2.11 / 8	2.64 / 10
services boiler resistance power	kW	3.85	3.85
external pump power	kW	0.165	0.165
preheating boiler capacity	US gal / lt	0.264 / 1.0	0.396 / 1.5
preheating boiler resistance power	kW	1.0	1.5
cup-heater power	kW	0.16	0.2
units boiler capacity	US gal / lt	0.264 / 1.0	0.396 / 1.5
units boiler resistance power	kW	1.6	2.4
net weight	lb / kg	214 / 97	265 / 120
gross weight (with shipping crate)	lb / kg	267 / 148	377 / 171





ENERGY SAVING SYSTEM

Insulation and energy saving system up until 40% compared to single boiler machines



POWER DRY STEAM

Low additional liquid during the milk steaming



EASY SERVICE

Fast access to the internal parts for quick and easy technical service



Café Racer, born to run
Link to the website



VOLUMETRIC PUMP PERFORMANCE


The unique 79.3 US gal - 300 l/h pump guarantees constant pressure in all conditions of machine use

HIGH PERFORMANCE FLOWMETER VOLUMETRICS

For an accurate and precise coffee dose in the cup



**Take a ride,
explore its essence**



Smart-touch setting of the individual groups

EVERYTHING UNDER CONTROL

System digital display to provide visibility of all working parameters



HEART OF STEEL

For maximum thermal stability:

- Groups in AISI 316L, weight 17.6 lb / 8 kg each
- Portafilters AISI 316
- Boilers AISI 316



ADJUSTABLE HEIGHT WORK SURFACE

Innovative Sanremo "All in one" suspension system that allows cups of different shapes and heights (adjustable from 3.35 to 5.90 inches / from 85 to 150 mm)



SOFT PRE-INFUSION

Flowactive System: for precise control of the water flow and pre-infusion time



Characteristics

AISI 316L STEEL GROUPS WITH 17.6 lb / 8 kg PURE STEEL
Exclusive Sanremo design ensure exceptional thermal stability and maximum resistance to oxidation and lime scale.

AISI 316 STAINLESS STEEL PORTAFILTER WITH "COMPETITION FILTER"
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.

AISI 316L STAINLESS STEEL FREE MOTION STEAM TAPS
Flexible control system for producing and dispensing steam.

AISI 316L STAINLESS STEEL STEAM WAND "COOL TOUCH"
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.

PROGRAMMABLE ELECTRONIC PRE-INFUSION
Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.

INDEPENDENT ADJUSTMENT OF THE PID INFUSION WATER TEMPERATURE
Precision setting (gradient ± 0.5 °C with measured constancy lower than 0.2°C).

SYSTEM DISPLAY
Visibility of all the machine functions: temperatures, pressures and levels.

COFFEE UNIT SINGLE DISPLAY
Control of all coffee extraction parameters.

MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Instantaneous mixing of fresh water and steam for a better chemical and organoleptic quality.

HIGH PERFORMANCE VOLUMETRIC PUMP
79.3 US gal - 300 l/h ***
Pressure stability also with prolonged and contemporary use of more than one group.

HIGH PERFORMANCE FLOWMETER VOLUMETRICS
For an accurate and precise coffee dose in the cup.

STEAM CONTROL ADJUSTABLE ELECTRONIC PRESSURE SWITCH
Sensor with 0.02 bar precision that allows the chosen pressure and steam in the boiler to be kept constant in all conditions of use.

PROGRAMMABLE CUP WARMER TEMPERATURE
Allows the cups to be kept at the optimum temperature in the most different climatic conditions.

ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.

LED LIGHTING OF THE WORK AREA
Allows efficient working in any condition of environmental lighting.

AUTO-DIAGNOSIS, STATISTICAL DATA, SCHEDULED MAINTENANCE
Maintenance can be scheduled according to litres or number of coffees dispensed.

AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION
Programmable on-off timer for each day and/or daily timetables.

AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.

BOILER WATER REGENERATION
Ensures resetting of the optimum chemical characteristics of the water and correct mineralisation.

GROUP FLUSHING
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

Optional



STAINLESS STEEL NAKED PORTAFILTERS




HIGH POWER STEAMER TERMINAL
(bigger holes diameter)



EXTERNAL VOLUMETRIC PUMP

NAKED

✓ Transparent side and back panels


Available in 2 finishes:
black and steel, 
both available with some components*
in black or red.

● ●
* rings, bolts, feet, boiler insulation



FREEDOM

✓ Coloured side and back panels with the rear-lit logo

Available in 2 finishes:
black and steel, 
both available with some components*
in black or red.

● ●
* rings, bolts, feet








CUSTOM

Welcome to the Custom world, greatest potential expression of the entire project named "Cafè Racer": customization and uninterrupted evolution. Some versions have already become real icons. Choose your style and get on your exclusive Cafè Racer.

Renegade



handmade finishes [ **Dark green**
 **Oxidized copper**
 **Brown leather**
 Polished brass
 Oxidized brass

Dolomiti




hand-sewn [ **Matt black**
 **Black steel**
 **Black leather**
 Dark chrome
 Stainless steel

_ White & Wood Standard


_ CUSTOM

24



-  **Matt white**
-  **Natural oak**
-  **Stainless steel**
-  **Natural oak**
- optional* **Matt white tray**

_ White & Wood Slim



_ Racing

_ CUSTOM

25



-  **Gloss red**
-  **Matt white**
-  **Carbon**
-  **Stainless steel**
-  **Black**

_ Moto di Ferro



-  **Matt black**
-  **Satinized aluminum**
-  **Stainless steel**
-  **Black**



Black & White

CUSTOM



- Matt white
- ○ Stainless steel
- ○ Matt black
- ○ Matt white

Full White



OFFICIAL MACHINE

SANREMO


CAFE' RACER
WORLD COFFEE EVENTS
2018.2020



F18




Versions



35.5 inches / 902 mm

2 group


- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

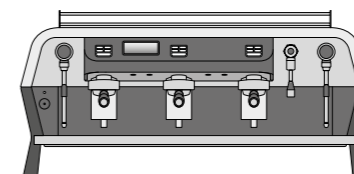

42.2 inches / 1072 mm



3 group

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters

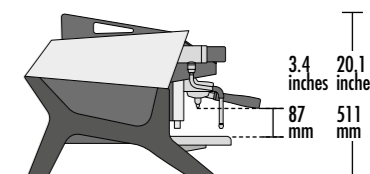

3.4 inches
87 mm

20.1 inches
511 mm

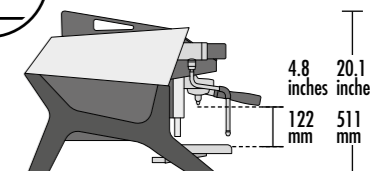


4.8 inches
122 mm

20.1 inches
511 mm



TALL VERSION

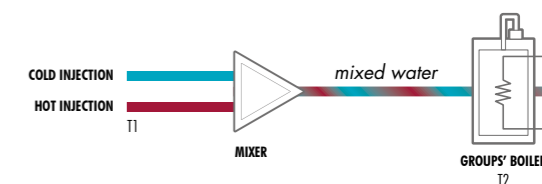

MULTIBOILER SYSTEM

Each group has a dedicated boiler powered by preheated water thanks to the mixing of cold and hot water coming from the heat exchangers; the group is kept at the ideal temperature by a specific resistor, which ensure a perfect thermal regulation.



Technical data		2 group	3 group
voltage	V	220-240 1N	380-415 3N
power input	kW	6.32	7.2
steam boiler capacity	US gal / lt	2.27 / 8.6	2.64 / 10
steam boiler power	kW	3.5	3.5
pump power	kW	0.15	0.15
boiler capacity	US gal / lt	0.26 / 1	0.39 / 1.5
boiler element power	kW	1	1.5
cup-heater power	kW	0.2	0.25
net weight	lb / kg	214 / 97	265 / 120

Colors


	Black Matte black	RAL 9005
	White Black	RAL 9003 9005
	Blue Matte black	RAL 5024 9005

In flight stability

Ready to take off

REALTIME STABILITY GROUP

Exclusive Sanremo design that allows an accurate maintenance of the set temperature



REALTIME STABILITY

Constancy in the electronic controlled temperature ($\pm 0.2^\circ\text{C}$)



QUICK STEAM COUPLING

The new half-turn knob allows extreme precision limiting physical stress



ENERGY SAVING SYSTEM

Insulation and energy saving system up until 40% compared to single boiler machines



STAINLESS STEEL "COLD TOUCH"

Anti-burning feature fitted with "Latte Art" high-performance steam terminals


OPERATION ALARM MANAGEMENT

Dedicated menu for malfunction and alarm records




SOFT PRE-INFUSION


Flowactive System: for precise control of the water flow and pre-infusion time



Control panel:

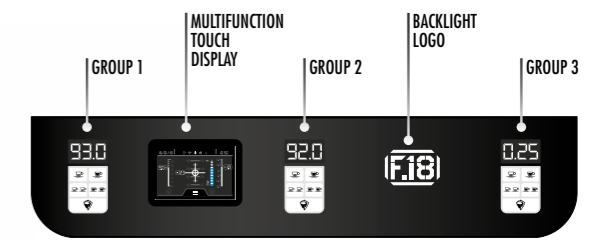


Keyboard 5 selections standard

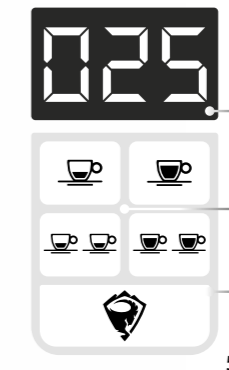

Keyboard 7 selections optional



MULTIFUNCTION TOUCH DISPLAY

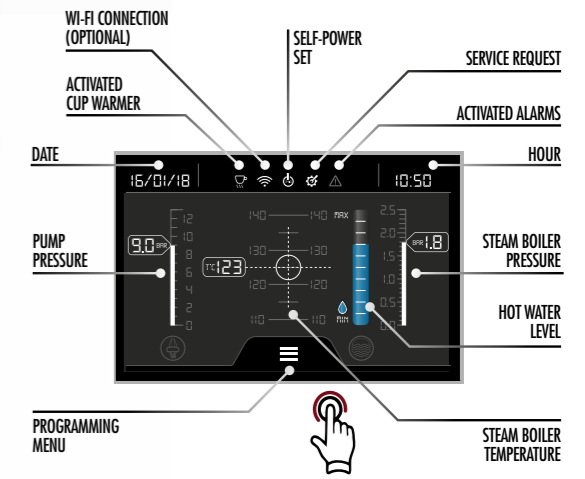

Characteristics

- MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS**
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.
- STATIC RELAY BOILER TEMPERATURE**
Allows to regulate the temperature as accurately as possible.
- STAINLESS STEEL COFFEE BOILER**
Guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone.

- INDEPENDENT REGULATION TEMPERATURE WATER COFFEE**
Maximum temperature precision and constancy of distribution.
- PROGRAMMABLE ELECTRONIC PRE-INFUSION**
Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.
- AISI 316L STAINLESS STEEL STEAM WAND "COLD TOUCH"**
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.

F18
Link to the website

- PROGRAMMABLE CUP WARMER TEMPERATURE**
Allows the cups to be kept at the optimum temperature in the most different climatic conditions.
- LED LIGHTING OF THE WORK AREA**
Allows efficient working in any condition of environmental lighting.
- AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION**
Programmable on-off timer for each day and/or daily timetables.

- ENERGY SAVING SYSTEM**
Insulation and energy saving system up until 40% compared to single boiler machines.
- REALTIME STABILITY GROUP**
Exclusive Sanremo design that allows a precise maintenance of the set temperature.
- EASY SERVICE**
Fast access to the internal parts for quick and easy technical service.
- AUTOMATIC CLEANING CYCLE**
Process for coffee groups cleaning.

- HIGH PERFORMANCE VOLUMETRIC PUMP**
Pressure stability also with prolonged and contemporary use of more than one group.
- COMPETITION FILTERS**
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.
- TEMPCONTROL**
For a very-high thermal stability ($\pm 0.2^\circ\text{C}$).
- GROUP FLUSHING**
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.


Optional

- AUTOSTEAM**
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.
- EXTERNAL VOLUMETRIC PUMP**
- HIGH POWER STEAMER TERMINAL**
(bigger holes diameter)
- STAINLESS PORTAFILTERS**

Verona RS




Versions



32.28 inches / 820 mm

2 group RS


- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

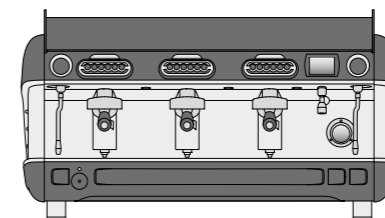


41.34 inches / 1050 mm

3 group RS

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters




3.07 inches / 78 mm
23.23 inches / 590 mm



5.51 inches / 140 mm
25.67 inches / 652 mm



TALL VERSION

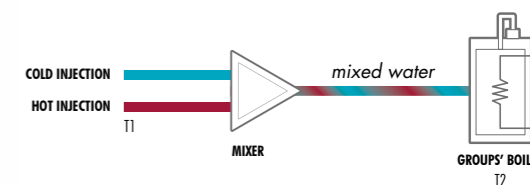

MULTIBOILER SYSTEM

Each group has a dedicated boiler powered by preheated water thanks to the mixing of cold and hot water coming from the heat exchangers; the group is kept at the ideal temperature by a specific resistor, which ensure a perfect thermal regulation.



Technical data

		2 group	3 group
voltage	V	220-240 1N	380-415 3N
power input	kW	5.6	6.4
steam boiler capacity	US gal / lt	2.27 / 8.6	3.7 / 14
steam boiler power	kW	3.8	3.8
pump power	kW	0.15	0.15
RS boiler capacity	US gal / lt	0.26 / 1	0.39 / 1.5
RS boiler element power	kW	1	1.5
cup-heater power	kW	0.2	0.25
net weight	lb / kg	150 / 68	187 / 85

Colors

	Black	RAL 9005
	White	RAL 1013
	Red	RAL 3002



RS GROUP
Exclusive Sanremo design that allows an accurate maintenance of the set temperature



Realtime Stability

A sprint of technology

REALTIME STABILITY

Constancy in the electronic controlled temperature ($\pm 0.2^\circ\text{C}$)



PRE-INFUSION SYSTEM

Enabled pre-infusion start&stop for each group



STAINLESS STEEL "COLD TOUCH"


Anti-burning feature fitted with "Latte Art" high-performance steam terminals



ENERGY SAVING SYSTEM




Insulation and energy saving system up until 40% compared to single boiler machines

Single group display:

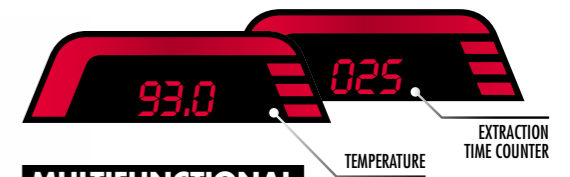

MULTIFUNCTIONAL DISPLAY

Touch display:

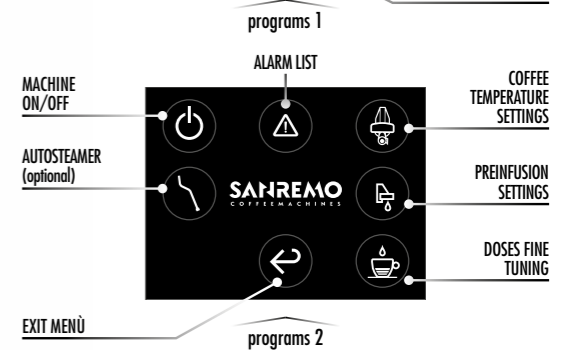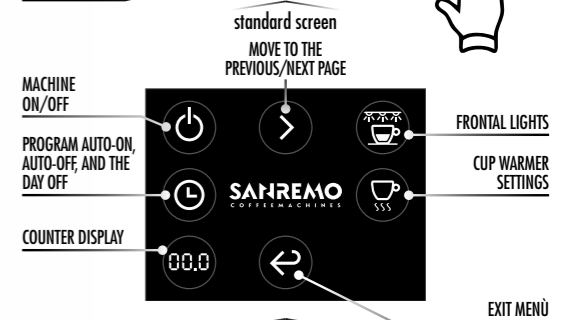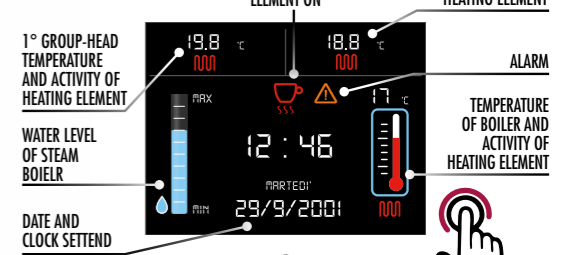

Characteristics

MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.

ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.

STATIC RELAY BOILER TEMPERATURE
Allows to regulate the temperature as accurately as possible.

STAINLESS STEEL COFFEE BOILER
Guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone.

INDEPENDENT REGULATION TEMPERATURE WATER COFFEE
Maximum temperature precision and constancy of distribution.

PRE-INFUSION SYSTEM
Enabled pre-infusion start&stop for each group.

AISI 316L STAINLESS STEEL STEAM WAND "COOL TOUCH"
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.

Verona RS
Link to the website

PROGRAMMABLE CUP WARMER POWER
Electronic programmable cup warmer to keep cups warmed at the right temperature.

LED LIGHTING OF THE WORK AREA
Allows efficient working in any condition of environmental lighting.

AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION
Programmable on-off timer for each day and/or daily timetables.

DOUBLE READING GAUGE
Allows to control at the same time the boiler pressure and the distribution pressure.

ENERGY SAVING SYSTEM
Insulation and energy saving system up until 40% compared to single boiler machines.

RS GROUP
Exclusive Sanremo design that allows a precise maintenance of the set temperature.

EASY SERVICE
Fast access to the internal parts for quick and easy technical service.

CLEANING CYCLE
Process for coffee groups cleaning.

HIGH PERFORMANCE VOLUMETRIC PUMP
Pressure stability also with prolonged and contemporary use of more than one group.

COMPETITION FILTERS
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.

TEMPCONTROL
For a very-high thermal stability ($\pm 0.2^\circ\text{C}$).

Optional

AUTOSTEAM
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.

EXTERNAL VOLUMETRIC PUMP

HIGH POWER STEAMER TERMINAL
(bigger holes diameter)

STAINLESS PORTAFILTERS

Verona



124 C° 10:00
SANREMO

TIME AND TEMPERATURE DISPLAY

only mod. SED



SED VERSION

Guarantees an electronic dosing system through the button panel



SAP VERSION

Allows the semi-automatic programming of doses

GROUP SR 61

Optimized to maintain the ideal coffee extraction temperature



Verona
Link to the website


Characteristics



MANUAL BOILER LOAD
Allows to bypass the electronic-level control.



ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



STATIC RELAY BOILER TEMPERATURE
Allows to regulate the temperature as accurately as possible.



GLASS LEVEL
Allows to monitor the water level in the boiler.



ACTIVATED ELECTRONIC PRE-INFUSION
Management of the delayed activation of water solenoid in the first phase of brewing.



MULTIFUNCTION DISPLAY
Allows to monitor the right functioning of the machine and to program the main functions.



DOUBLE READING GAUGE
Allows to control at the same time the boiler pressure and the distribution pressure.



GROUP SR 61
Chromed brass grouphead with thermosiphonic circulation system optimized to maintain the ideal coffee extraction temperature.



EASY SERVICE
Fast access to the internal parts for quick and easy technical service.




AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.

Colors

	Red	RAL 3002
	Matte black	RAL 9005
	Black	RAL 9005
	Silver	RAL 9006
	Pearl white	RAL 1013
	White	RAL 9003




Versions



32.28 inches / 820 mm

2 group SED/SAP


- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

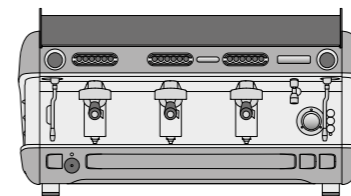

41.34 inches / 1050 mm

3 group SED/SAP

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters

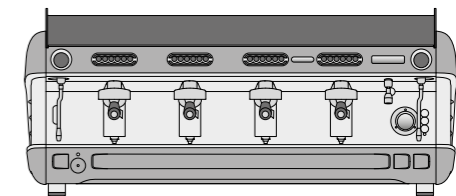


51.97 inches / 1320 mm

4 group SED/SAP


- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 4 two-cup portafilters

23.23 inches
590 mm



24.02 inches / 610 mm

3.07 inches
78 mm



5.51 inches
140 mm

25.67 inches
652 mm

TALL VERSION

Optional



AUTOSTEAM
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.



COMPETITION FILTERS
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.



EXTERNAL VOLUMETRIC PUMP



MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.

Technical data

		2 group	3 group	4 group
voltage	V	220-240 1N / 380-415 3N		
power input	kW	3.15 - 3.35	5.8 - 6.05	5.8 - 6.05
steam boiler capacity	US gal / lt	3.17 / 12	5.02 / 19	5.97 / 22.6
steam boiler power	kW	2.95	5.6	5.6
pump power	kW	0.15	0.15	0.15
net weight	lb / kg	150 / 68	187 / 85	240 / 109



CUP WARMER
Dedicated resistor to keep all the cups at the optimal temperature.



NAKED PORTAFILTERS



BLUETOOTH COMMUNICATION SYSTEM



Zoe Competition



COLORED AND VERSATILE
Totally matching every type of decorative solution thanks to the possible customizations



SHOT TIMER
To accurately and reliably time coffee extraction



LED LIGHTING OF THE WORKING AREA
Allows to effectively work in any light condition



EASY SERVICE
Fast access to the internal parts for quick and easy technical service



LOW SERVICE COST
Designed to decrease the maintenance and inspection costs



Characteristics

ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.

ACTIVATED ELECTRONIC PRE-INFUSION
Management of the delayed activation of water solenoid in the first phase of brewing.

DOUBLE READING GAUGE
Allows to control at the same time the boiler pressure and the distribution pressure.

EASY SERVICE
Fast access to the internal parts for quick and easy technical service.

AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.

LED LIGHTING OF THE WORK AREA
Allows efficient working in any condition of environmental lighting.

SHOT TIMER
To accurately and reliably time coffee extraction.

Optional

AUTOSTEAM
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.

CUP WARMER
Dedicated resistor to keep all the cups at the optimal temperature.







EXTERNAL VOLUMETRIC PUMP



NAKED PORTAFILTERS


Versions

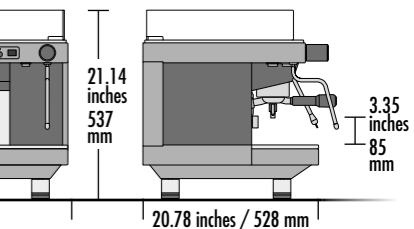

1 group
1 steam tap
1 water tap
1 one-cup portafilters
1 two-cup portafilters

2 group
2 steam taps
1 water tap
1 one-cup portafilters
2 two-cup portafilters

3 group
2 steam taps
1 water tap
1 one-cup portafilters
3 two-cup portafilters

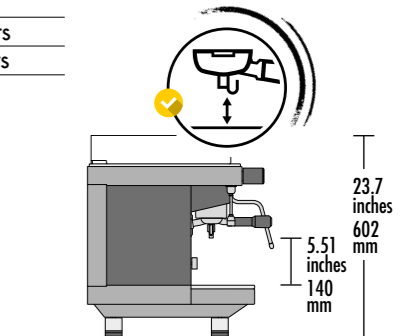

TALL VERSION
2-3 group

Technical data


		1 group	2 group	3 group
voltage	V	220-240 1N	380-415 3N	
power input	kW	2.7	3.3	6
steam boiler capacity	US gal / lt	1.85 / 7	2.64 / 10	3.7 / 14
steam boiler power	kW	2.5	2.95	5.6
pump power	kW	0.13	0.13	0.13
net weight	lb / kg	99 / 45	121 / 55	152 / 69



Colors

	Black	RAL 9005
	White Black	RAL 9003 9005
	White Matte black	RAL 9003 9005
	White Red	RAL 9003 3002

PERSONALISED GRAPHICS

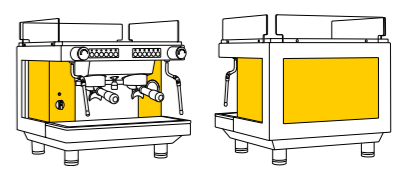

Zoe Competition
Link to the website

Customization of internal panels with graphics and colors (on request).

Zoe

COLORED AND VERSATILE

Totally matching every type of decorative solution thanks to the possible customizations



SED VERSION

Guarantees an electronic dosing system through the button panel




SAP VERSION

Allows the semi-automatic programming of doses



COMPLETE RANGE

Available versions: SED and SAP, 1-2-3 group, Tall and Compact



EASY SERVICE

Fast access to the internal parts for quick and easy technical service

LOW SERVICE COST

Designed to decrease the maintenance and inspection costs



Characteristics



ELECTRONIC AUTO-LEVEL

Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



ACTIVATED ELECTRONIC PRE-INFUSION

Management of the delayed activation of water solenoid in the first phase of brewing.



DOUBLE READING GAUGE

Allows to control at the same time the boiler pressure and the distribution pressure.



EASY SERVICE

Fast access to the internal parts for quick and easy technical service.



AUTOMATIC CLEANING CYCLE

Process for coffee groups cleaning.

Optional



AUTOSTEAM

Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.



CUP WARMER

Dedicated resistor to keep all the cups at the optimal temperature.



EXTERNAL VOLUMETRIC PUMP




BLUETOOTH COMMUNICATION SYSTEM




NAKED PORTAFILTERS




Versions




20.87 inches / 530 mm



28.35 inches / 720 mm



37.40 inches / 950 mm

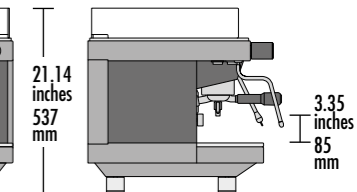

21.14 inches / 537 mm

3.35 inches / 85 mm

1 group SED/SAP


- 1 steam tap
- 1 water tap
- 1 one-cup portafilters
- 1 two-cup portafilters

2 group SED/SAP

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters


3 group SED/SAP

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters



20.87 inches / 530 mm

21.38 inches / 543 mm



23.7 inches / 602 mm

5.51 inches / 140 mm

COMPACT VERSION

2 group

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

TALL VERSION

2-3 group

- SED
- SAP

Technical data


		1 group	2 group	3 group	compact
voltage	V		220-240 1N	380-415 3N	
power input	kW	2.7	3.3	6	2.3
steam boiler capacity	US gal / lt	1.85 / 7	2.64 / 10	3.7 / 14	1.19 / 4.5
steam boiler power	kW	2.5	2.95	5.6	2.15
pump power	kW	0.13	0.13	0.13	0.13
net weight	lb / kg	99 / 45	121 / 55	152 / 69	90 / 41

Colors

	Black	RAL 9005
	White Black	RAL 9003 9005
	White Matte black	RAL 9003 9005
	White Red	RAL 9003 3002



PERSONALISED GRAPHICS

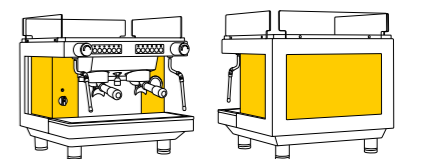

Zoe
Link to the website

Customization of internal panels with graphics and colors (on request).

Napoli



LEVER GROUP

High-performance lever group with Sanremo technology

TEMPERATURE SETTING DISPLAY

Allows the regulation of the water temperature




Characteristics



MANUAL BOILER LOAD
Allows to bypass the electronic-level control.



ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



STATIC RELAY BOILER TEMPERATURE
Allows to regulate the temperature as accurately as possible.



GLASS LEVEL
Allows to monitor the water level in the boiler.



BOILER PRESSURE GAUGE
Allows to control the boiler pressure.



PUMP PRESSURE GAUGE
Allows to control the distribution pressure.



EASY SERVICE
Fast access to the internal parts for quick and easy technical service.



TEMPERATURE SETTING DISPLAY
Allows to regulate with precision the water temperature in the boiler for the production of coffee.



EXTERNAL VOLUMETRIC PUMP




CUP WARMER
Dedicated resistor to keep all the cups at the optimal temperature.


Optional




Versions




30.71 inches / 780 mm



39.76 inches / 1010 mm

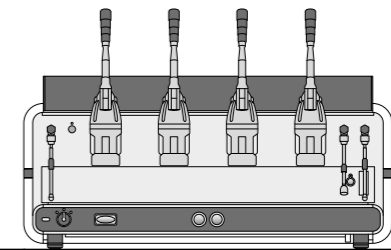

48.82 inches / 1240 mm



32.28 inches
820 mm

2 group

2 steam taps
1 water tap
1 one-cup portafilters
2 two-cup portafilters

3 group

2 steam taps
1 water tap
1 one-cup portafilters
3 two-cup portafilters

4 group

2 steam taps
1 water tap
1 one-cup portafilters
4 two-cup portafilters



Colors

	Black	RAL 9005
	White	RAL 9003
	White/Matte black	RAL 9003/9005
	White/Red	RAL 9003/3002



Technical data

		2 group	3 group	4 group
voltage	V	220-240 1N / 380-415 3N		
power input	kW	3.85	5.9	7.15
steam boiler capacity	US gal / lt	3.17 / 12	5.02 / 19	6.87 / 26
steam boiler power	kW	3.5	5.5	7
pump power	kW	0.13	0.13	0.13
net weight	lb / kg	172 / 78	240 / 109	291 / 132



Napoli
Link to the website



Torino



LED LIGHTING OF THE WORKING AREA

Allows to effectively work in any light condition (optional)



SED VERSION

Guarantees an electronic dosing system through the button panel



SAP VERSION

Allows the semi-automatic programming of doses



GROUP SR 61

Optimized to maintain the ideal coffee extraction temperature



Characteristics

MANUAL BOILER LOAD
Allows to bypass the electronic-level control.

ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.

GLASS LEVEL
Allows to monitor the water level in the boiler.

ACTIVATED ELECTRONIC PRE-INFUSION
Management of the delayed activation of water solenoid in the first phase of brewing.

BOILER PRESSURE GAUGE
Allows to control the boiler pressure.

READY MACHINE GAUGE
Indicates when the machine has reached the optimal temperature.


PUMP PRESSURE GAUGE
Allows to control the distribution pressure.

GROUP SR 61
Chromed brass grouphead with thermosiphonic circulation system optimized to maintain the ideal coffee extraction temperature.


EASY SERVICE
Fast access to the internal parts for quick and easy technical service.

AUTOMATIC CLEANING CYCLE
Process to clean the coffee groups.


Versions



30.71 inches / 780 mm

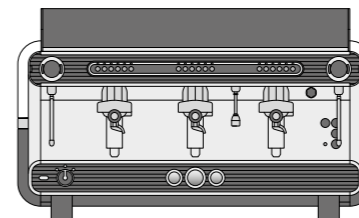

39.76 inches / 1010 mm



22.83 inches / 580 mm

2 group SED/SAP

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

3 group SED/SAP

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters

Colors

	Black	RAL 9005
	White	RAL 9003
	White/Matte black	RAL 9003/9005
	White/Red	RAL 9003/3002



Optional

LED LIGHTING OF THE WORK AREA
Allows efficient working in any condition of environmental lighting.

CUP WARMER
Dedicated resistor to keep all the cups at the optimal temperature.

COMPETITION FILTERS
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.

EXTERNAL VOLUMETRIC PUMP

BLUETOOTH COMMUNICATION SYSTEM

NAKED PORTAFILTERS



Torino
Link to the website



Technical data		2 group	3 group
voltage	V	220-240 1N	380-415 3N
power input	kW	3.3	6
steam boiler capacity	US gal / lt	3.17 / 12	5.01 / 19
steam boiler power	kW	2.95	5.6
pump power	kW	0.15	0.15
net weight	lb / kg	139 / 63	174 / 79

Treviso





TWO VERSIONS

Available versions:
Treviso and Treviso LX



Versions

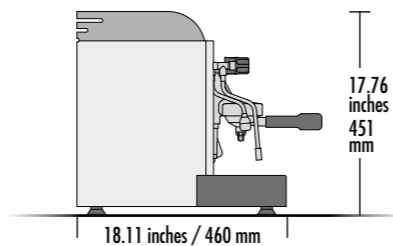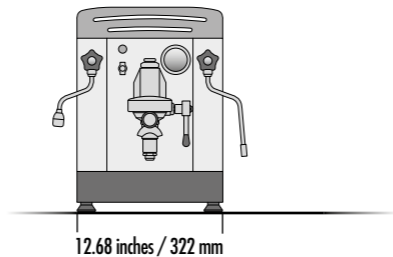

1 group | 1 group LX

- 1 steam tap
- 1 water tap
- 1 one-cup portafilters
- 1 two-cup portafilters



Characteristics	TREVISO	TREVISO LX
plumbing hook-up		●
electronic automatic level	●	●
copper boiler and pipes	●	●
coffee brewing level	●	●
single manometer	●	●
vibrating pump	●	
rotating pump		●
3,4 lt water tank	●	
cappuccino maker	○	○

Technical data		TREVISO	TREVISO LX
voltage	V	120 / 230	
power input	kW	1.35	1.55
steam boiler capacity	US gal / lt	27.74 / 1.05	0.47 / 1.8
steam boiler power	kW	1.3	1.5
pump power	kW	0.048	0.12
net weight	lb / kg	47 / 21	50 / 23

Colors

Stainless steel with bright shapes



Treviso
Link to the website

- standard
- optional

Grinders



On demand / Grinder doser

SR 83 OD



Optional

"RED SPEED" BURRS
Improves the quality of grinding and offers a much longer life span. (PVD-coated)

Colors

	Black	RAL 9017
	Silver	RAL 9006
	White	RAL 9003
	Red	RAL 3002

CE

Technical data		SR 83 OD
power	W	650
burrs	-	flat
burrs diameter	inch / mm	3.27 / 83
motor speed 50 Hz	rmp	1350
motor speed 60 Hz	rmp	1550
coffee beans hopper capacity	lb / kg	3.3 / 1.5
net weight	lb / kg	44 / 20
width	inch / mm	9.05 / 230
height	inch / mm	26.73 / 679
dept	inch / mm	10.63 / 270

On demand / Conical grinder doser

SR 71C OD



Grinders
Link to the website



INVERTER TECHNOLOGY
The system ensures absolute precision and consistency for grinding, reducing motor consumption, operating noiselessly and showing exceptional reliability even during long time operations.

CE

Technical data		SR 71C OD
power	W	850
burrs	-	conical
burrs diameter	inch / mm	2.79 / 71
motor speed 50 Hz	rmp	450
motor speed 60 Hz	rmp	500
coffee beans hopper capacity	lb / kg	3.3 / 1.5
net weight	lb / kg	42 / 19
width	inch / mm	9.05 / 230
height	inch / mm	26.34 / 670
dept	inch / mm	10.63 / 270

On demand / Grinder doser

ON DEMAND

• Conical grinders

SR 83 OD



SR 71C OD



SR 64 OD



SR 64 OD evo



50

Technical data

		SR 83 OD	SR 71 C OD	SR 64 OD	SR 64 OD evo	SR 58 OD
power	W	650	850	350	350	250
burrs	-	flat	conical	flat	flat	flat
burrs diameter	inch / mm	3.27 / 83	2.79 / 71	2.52 / 64	2.52 / 64	2.28 / 58
motor speed 50 Hz	rmp	1350	450	1350	1350	1400
motor speed 60 Hz	rmp	1550	500	1550	1550	1600
coffee beans hopper capacity	lb / kg	3.3 / 1.5	3.3 / 1.5	3.3 / 1.5	3.3 / 1.5	1.3 / 0.6
net weight	lb / kg	44 / 20	42 / 19	31 / 14	31 / 14	22 / 10
width	inch / mm	9.05 / 230	9.05 / 230	9.05 / 230	9.05 / 230	6.65 / 169
height	inch / mm	26.73 / 679	26.34 / 670	24.21 / 615	24.21 / 615	18.62 / 473
dept	inch / mm	10.63 / 270	10.63 / 270	10.63 / 270	10.63 / 270	9.45 / 240

SR 58 OD



CE

Manual / Grinder doser

MANUAL

SR 64 M



SRQ 63 M



CE

Technical data

		SR 64 M	SRQ 63 M
power	W	350	300
burrs	-	flat	flat
burrs diameter	inch / mm	2.52 / 64	2.48 / 63
motor speed 50 Hz	rmp	1350	1400
motor speed 60 Hz	rmp	1550	1600
coffee beans hopper capacity	lb / kg	3.3 / 1.5	2.6 / 1.2
net weight	lb / kg	31 / 14	25 / 11.4
width	inch / mm	9.05 / 230	6.29 / 160
height	inch / mm	24.21 / 615	20.08 / 510
dept	inch / mm	10.63 / 270	11.42 / 290

Automatic / Grinder doser

AUTOMATIC

• Conical grinders

SR 83 A



SR 64 A



SR 63 CA



SRQ 63 A



IECEx

51

CE


Technical data

		SR 83 A	SR 64 A	SR 63 CA	SRQ 63 A	SR 58 A
power	W	650	350	750	300	250
burrs	-	flat	flat	conical	flat	flat
burrs diameter	inch / mm	3.27 / 83	2.52 / 64	2.48 / 63	2.48 / 63	2.28 / 58
motor speed 50 Hz	rmp	1400	1350	450	1400	1400
motor speed 60 Hz	rmp	1600	1550	500	1600	1600
coffee beans hopper capacity	lb / kg	3.3 / 1.5	3.3 / 1.5	3.3 / 1.5	2.6 / 1.2	1.3 / 0.6
net weight	lb / kg	45 / 20.5	31 / 14	45 / 20.5	25 / 11.4	22 / 10
width	inch / mm	9.05 / 230	9.05 / 230	9.05 / 230	6.29 / 160	6.65 / 169
height	inch / mm	26.38 / 670	24.21 / 615	26.38 / 670	20.08 / 510	18.62 / 473
dept	inch / mm	10.63 / 270	10.63 / 270	10.63 / 270	11.42 / 290	9.45 / 240

SR 58 A



Optional



"RED SPEED" BURRS
Improves the quality of grinding and offers a much longer life span. (PVD-coated)

Available for SR 83 OD and SR 64 OD EVO models.

Colors

	Black	RAL 9017
	Silver	RAL 9006
	White	RAL 9003
	Red	RAL 3002

The SR 58 A and SR 58 OD models are not available in the silver version and the SR 63 CA model is not available in red color.

Accessories

Glass-washer



Merchandise



Milk jug



Medium
capacity: 50 cl

Large
capacity: 75 cl



BLACK MILK JUG

Coffee cups



Coffee
capacity: 80 cl
height: 52 mm
diameter: 65 mm

Cappuccino
capacity: 165 cl
height: 60 mm
diameter: 86 mm

Milk
capacity: 260 cl
height: 65 mm
diameter: 95 mm

Coffee tamper & tamping stand



SANREMO TAMPING STAND

Coffee tamper black/inox medium
height: 80 mm

Coffee tamper black/inox large
height: 90 mm



Sanremo

Opera 2.0

Café Racer



width: 400 mm
dept: 250 mm
height: 550 mm

SANREMO TROLLEY



width: 380 mm
height: 420 mm

BLACK BAG



UMBRELLA



format A4
100 sheets
biro
black ink

NOTEBOOK & PEN SET

Adhesives



width: 75 mm
height: 75 mm



width: 65 mm
height: 65 mm



LANYARDS

Merchandise Wear



Merchandise
Link to the website

Sanremo style is on the move!
Browse the gallery on our website to discover new models and the currently available assortment of merchandising.

Sanremo Sweatshirts



MAN SWEATSHIRT

- 100% high quality cotton
- Size S, M, L, XL



WOMAN SWEATSHIRT

- 100% high quality cotton
- Size S, M, L, XL

Sanremo Apron



Colors



Black | Leather



Sanremo T-shirts



- GREEN
- BURGUNDY

SANREMO INSPIRE T-SHIRT

- 100% high quality cotton
- Size S, M, L, XL, XXL



CAFÉ RACER BIKE T-SHIRT

- 100% high quality cotton
- Size S, M, L, XL, XXL



ADVENTURER T-SHIRT

- 100% high quality cotton
- Size S, M, L, XL, XXL



THE BRAVE INSPIRE T-SHIRT

- 100% high quality cotton
- Size S, M, L, XL, XXL



SANREMO T-SHIRT Y

- 100% high quality cotton
- Size S, M, L, XL



SANREMO T-SHIRT R

- 100% high quality cotton
- Size S, M, L, XL

